


MANUAL ACTUATOR HEAD 227DM

Description

The purpose of this actuator head is to actuate by manual force the valves of the cylinders on which it is fitted. Once the safety pin is removed, the manual lever can be turned in the opposite direction from its resting position to produce the release.

The manual actuator 227DM can be installed in the upper actuation port of the container valve RGS-MAM-12-2FD / ST1 / 20ST and End of line type 1 (ST-FL1-Ø6) by means of a revolving nut which allows its right orientation also, it can be installed in the electrical actuator 227SOL / 227SOLC.

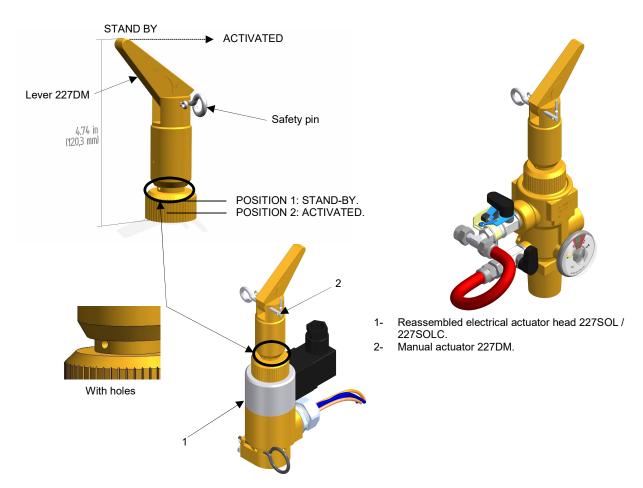


Technical information

Manual actuator head 227DM	
Code	227DM
Re-assembled requirements	Manual (lever)
Connection to the container valve RGS-MAM-12-2FD / ST1 / 20ST, Re-assembled electrical actuator head and End of line type 1 (ST-FL1-Ø6)	3/4" BSP Female
Route of the lever to obtain the activation	86°



Safety:

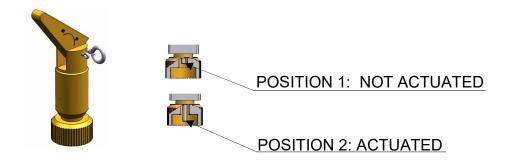

Before threading the manual actuator to the activation port of the valve, check that the actuator pointer is retracted (position 1).

If the actuator pointer is in position 2, when threading the manual actuator, the gas extinguisher contained in the cylinder could discharge violently, causing serious injuries to the person handling it. Do not install the manual actuator without holding the cylinder to the wall with its brackets.

REVOLVING NUT:

- Thread it to the valve activation port or electrical actuator.
- Do not add sealant, or teflon or glue.
- Tighten with the hand.

To remove the manual actuator from the valve, loosen its revolving nut by hand.

When doing this operation the valve cap must not be turned, as this will cause the contents of the cylinder to be discharged violently, which could cause serious injuries.

Do not remove the manual actuator unless the cylinder is attached to the wall by its brackets.

WARNING: This device is manufactured and approved to be used in fixed extinguishing installations with HFC-227ea. These products are not designed for other use or purpose. If product user has any doubt regarding the application or product use, please contact +34 947 28 11 08. Every not approved use or application or / and any other not approved modification of the product or its function may cause serious accidents or / and personal damages. SIEX 2001 is not responsible for any non-approved use of the application.

IMPORTANT: SIEX 2001 reserves the right to change or modify without previous notice any data or specification due to changes or modification in order to improve the products presented.