


## PULLEY ELBOW TK-CP1

### Description

Its function is to drive the stainless steel cable to avoid the obstacles and the changes of direction and height to connect the remote manual pull station (TK-DMS) with the manual actuator (227CMC or 227CMCC). Also, it connects the components which are intended to use with cable and needs to change the direction of the cable. It has a little bearing whit channel for the cable, like a little pulley that allows changes of direction of 90°.

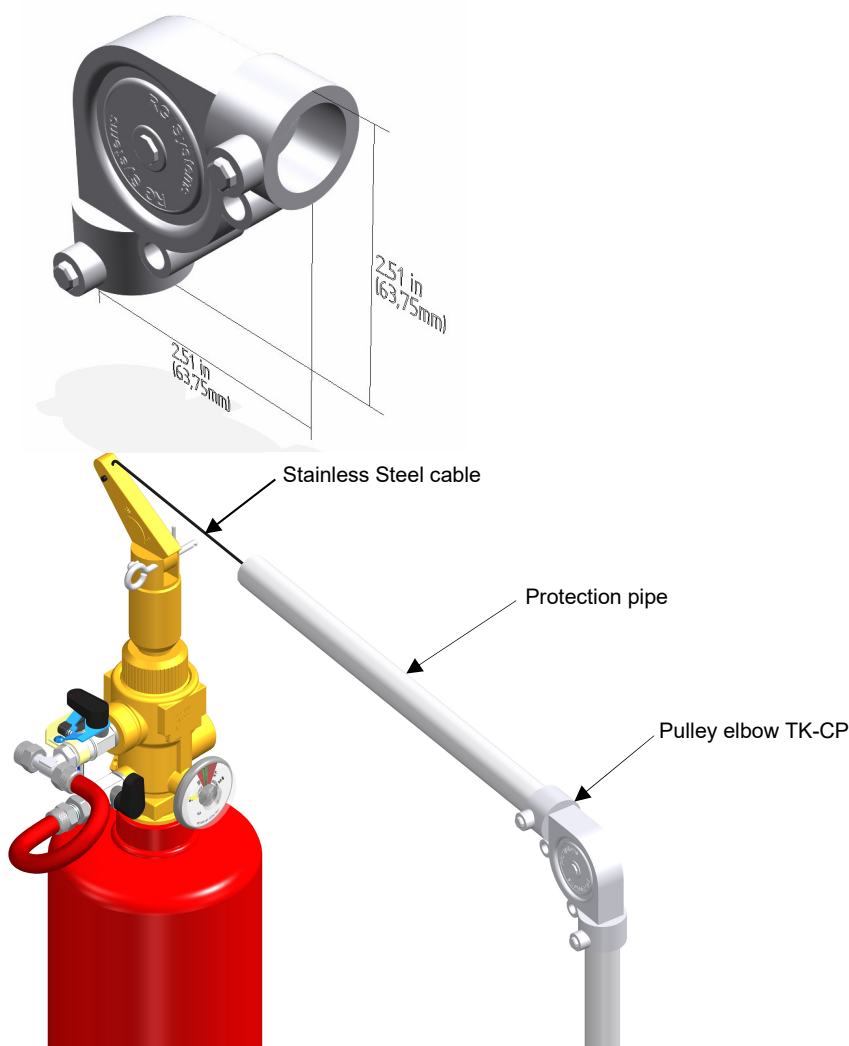

### Technical information

Pulley elbow TK-CP	
Protection pipe	pipe Ø 0.7 In (Ø 18 mm)
Cable	Stainless steel Ø 0,06 In (Ø 1.5 mm)
Union to pipe	With prisoner screw

WARNING: This device is manufactured and approved to be used in fixed extinguishing installations with HFC-227ea. These products are not designed for other use or purpose. If product user has any doubt regarding the application or product use, please contact +34 947 28 11 08. Every not approved use or application or / and any other not approved modification of the product or its function may cause serious accidents or / and personal damages. SIEX 2001 is not responsible for any non-approved use of the application.

IMPORTANT: SIEX 2001 reserves the right to change or modify without previous notice any data or specification due to changes or modification in order to improve the products presented.