

LIFE SAFETY *g* INCIDENT MANAGEMENT

Call for Assistance Kit

6538-G5



Overview

The EDWARDS 6538-G5 Call For Assistance Kit is designed for areas where a call-for-help or an emergency switch is required. The kit consists of a horn/strobe for audible and visual signaling, an emergency pull cord station, and a transformer.


Application

Use the Call for Assistance Kit in health care facilities, public rest rooms, and handicapped areas.

Standard Features

- All-in-one call for assistance package
- Uses single-gang boxes
- Easy to install
- Visual and audible signaling
- Resettable at the initiating station

Wiring

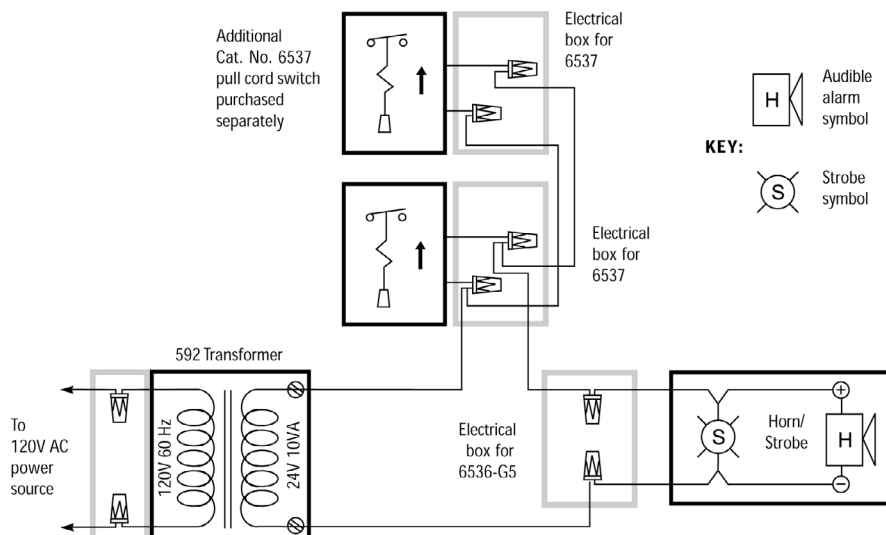



LIFE SAFETY & INCIDENT MANAGEMENT

Contact us

Phone: 800-655-4497 (Option 4)
Email: edwards.fire@carrier.com
Website: edwardsfiresafety.com


8985 Town Center Pkwy
Bradenton, FL 34202

© 2020 Carrier
All rights reserved.

Specifications


Horn/Strobe

| | |
|-------------------|---|
| Sound output | 82 dBA at 10 ft. (3.05 m) |
| Strobe output | 11.7 cd |
| Electrical rating | 24 V 50/60 Hz or 24 Vdc |
| Current draw | 175 mA @ 24 V 50/60 Hz; 125 mA @ 24 Vdc |
| Mounting | Single-gang 2" x 4" (51 mm x 102 mm) electrical box |
| Color | Neutral beige |
| Agency Listing | UL |

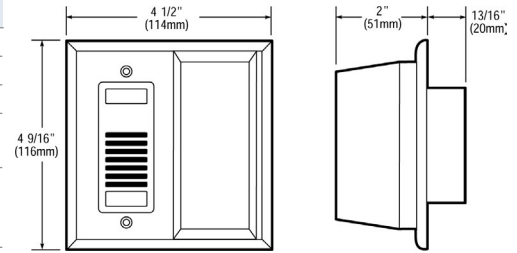


Pull Cord Station

| | |
|-------------------|---|
| Electrical rating | 3 amps @ 125 Vac; 0.5 amps @ 125 Vdc |
| Mounting | Flush or surface |
| Faceplate | Stainless steel |
| Contacts | Double poll single throw |



Transformer

| | |
|---------------------|--|
| Input voltage | 120 Vac |
| Output voltage | 24 Vdc |
| Mounting | Mount in a standard 1/2" (13 mm) knockout or surface mount using the provided foot mounts. Also suitable for mounting in both plastic and metal backboxes. |
| Wiring connections | Pre-stripped pigtails |
| Overload protection | Thermal non-regenerative |
| Agency listings | UL, CSA |

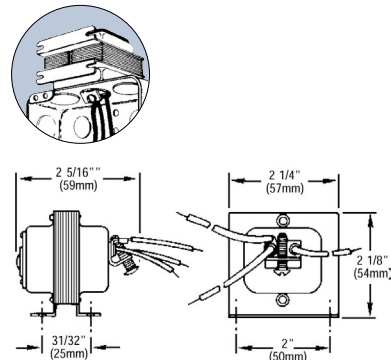

Ordering Information

| Catalog Number | Description | Ship Wt. |
|----------------|-------------------------|------------------|
| 6538-G5 | Call for Assistance Kit | 2 lbs. (0.9 kg.) |