

LIFE SAFETY &amp; INCIDENT MANAGEMENT

## Smoke Detector Guard

### SIGA-GRD

**SIGA-GRD**

### Overview

The SIGA-GRD Smoke Detector Guard protects Signature Series smoke detectors from damage and tampering without affecting airflow to the detector head. The sophisticated louver configuration on the detector guard allows Signature smoke detectors to be installed at their listed spacing and has no effect on the detector's selected operating sensitivity. The guard is constructed of rugged 16-gauge steel and is finished with durable white baked powder coat enamel.

### Standard Features

- **Agency listed with Signature Series smoke detectors**  
Tested and listed by Underwriters' Laboratories Inc.
- **Compatible with Signature Series smoke and CO detectors**  
Advanced design does not affect detector sensitivity; does not reduce the listed detector spacing.
- **Rugged, tamper-proof design**  
16-gauge steel louvered construction provides superior physical protection. Special fasteners guard against unauthorized access to the detector.
- **Easy mounting**  
Simple design ensures very fast, very secure installation, yet allows easy removal for detector cleaning and inspection.
- **Flush or surface mount**  
SIGA-DGSB Surface Mount Accessory allows installation over surface mounted conduit and electric boxes.

### Application

Detector guards should be used wherever flying objects may accidentally damage the detector, or wherever they may be intentionally damaged or used to conceal contraband. Typical applications include correctional or detention facilities, mental hospitals, industrial or warehousing spaces, sports facilities and gymnasiums.

NFPA 72 Section 5-1.3.1 states "*Where subject to mechanical damage, an initiating device shall be protected. A mechanical guard used to protect a smoke or heat detector shall be listed for use with the detector being used*".



LIFE SAFETY & INCIDENT MANAGEMENT

**Contact us**

Phone: 800-655-4497 (Option 4)  
 Email: [edwards.fire@carrier.com](mailto:edwards.fire@carrier.com)  
 Website: [edwardsfiresafety.com](http://edwardsfiresafety.com)


8985 Town Center Pkwy  
 Bradenton, FL 34202

© 2020 Carrier  
 All rights reserved.

## Installation and Mounting

The SIGA-GRD may be mounted one of three ways:

1. Directly to the ceiling, enclosing a detector installed to a flush-mounted electrical box.
2. To the SIGA-DGSB Surface Mount Adapter, which encloses a surface-mount electrical box.
3. To the optional mounting flange. This accessory is useful where the detector guard is removed periodically for inspection.

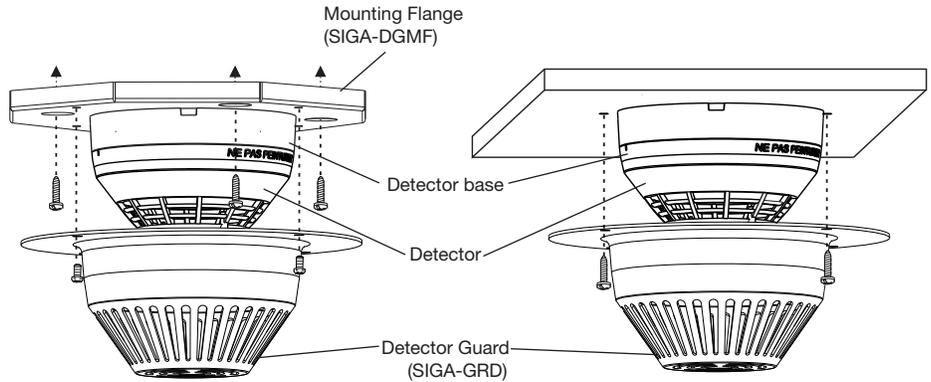

## Specifications

	<b>SIGA-GRD Detector Guard</b>	<b>SIGA-DGSB Detector Guard Surface Adapter</b>
Construction	16 gauge steel	
Dimensions	7.27 inch (184.7mm) diameter x 3.25 inch (82.6mm) high	8.9 inch (225mm) octagonal x 2.25 inch (57mm) high
Finish	White; baked powder coat enamel	
Mounting	Mounts over flush 1-gang, octagon, and four-inch square North American electric boxes	Encloses surface mounted octagon or one-gang electric box
Compatible Detectors	Compatible detectors (UL268 6th edition): SIGA-COD, SIGA-COD-CA, SIGA-PCD. Compatible detectors (UL268 7th edition): SIGA-OSD, SIGA-OSHD, SIGA-OSCD, SIGA-OSHCD with date code 19205 or later. Bases: SIGA-SB, SIGA-RB, SIGA-IB, SIGI-SB	
Agency Listings	UL, ULC, CSFM	-

EDWARDS recommends that fire alarm systems and devices always be installed in accordance with the latest recognized edition of national and local fire alarm codes.

## Ordering Information

<b>Catalog Number</b>	<b>Description</b>	<b>Ship Wt., lb. (kg)</b>
SIGA-GRD	Smoke Detector Guard	0.8 (0.36)
SIGA-DGSB	Detector Guard Surface Mount Accessory	2 (0.9)
SIGA-DGMF	Mounting Flange (optional)	2. (0.9)